

CA-C10L-SH-NC Product Description

This shielded cable features 24 AWG conductors and a 10-position high-retention connector on one end and flying leads on the other. The TE Connectivity connector consists of a pre-loaded IDC housing (1-102694-0 (<https://www.te.com/usa-en/product-1-102694-0.html>)), a polarizing cover (102537-3 (<https://www.te.com/usa-en/product-102537-3.html>)), and a strain relief cover (102536-3 (<https://www.te.com/usa-en/product-102536-3.html>)). This cable is compatible with US Digital's PC5 cable driver for Avago/Agilent pinouts..




WARNING: This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (<https://oehha.ca.gov/proposition-65>).

Specifications



PIN-OUT

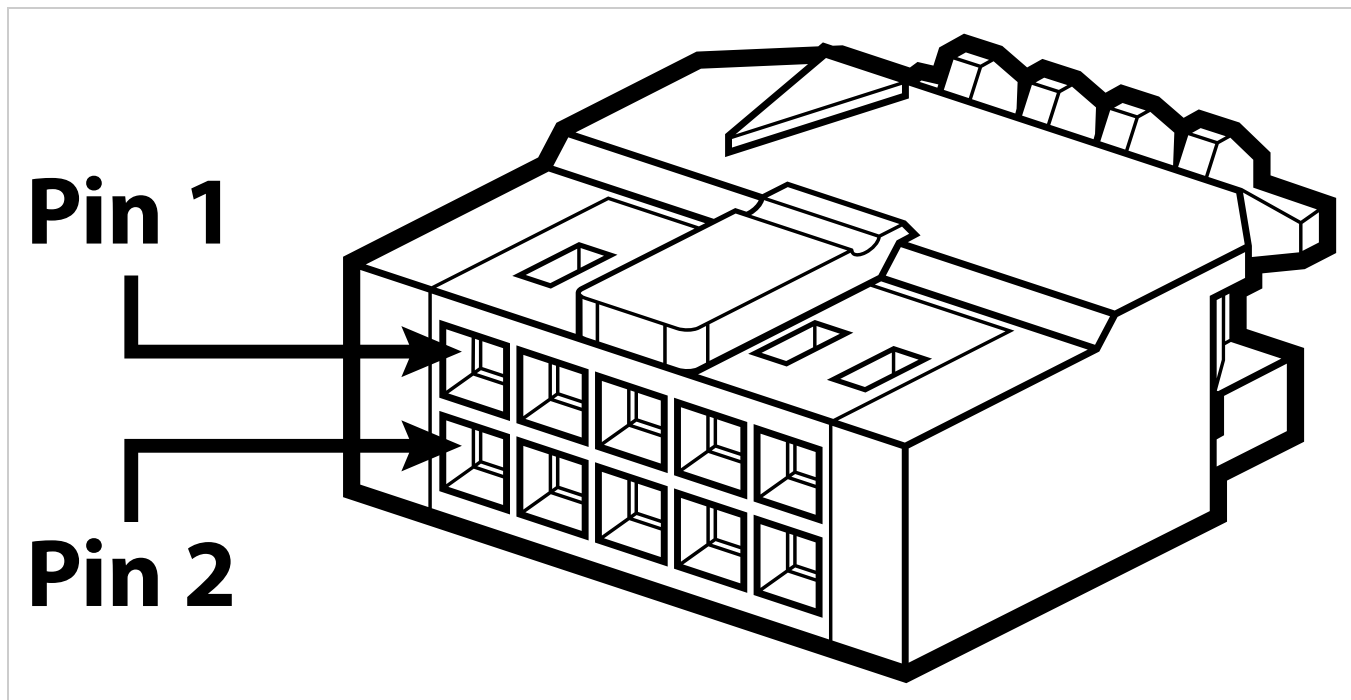

PIN	DESCRIPTION	COLOR
1	-	-
2	Power	Orange / White Stripe
3	Ground	White / Orange Stripe
4	-	-
5	A- channel	White / Blue Stripe
6	A+ channel	Blue / White Stripe
7	B- channel	White / Green Stripe
8	B+ channel	Green / White Stripe
9	I- channel	White / Brown Stripe
10	I+ channel	Brown / White Stripe

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.



Configuration Options

CA-C10L-SH-NC	-	First Connector	-	Cable Type	-	Second Connector	-	Length
		C10L		SH		NC		Length

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the CA-C10L-SH-NC product page (<https://www.usdigital.com/products/CA-C10L-SH-NC>) for pricing and additional information.