



CA-FC5-SH-MIC3 Product Description

This shielded cable has 26 AWG conductors, a 5-position latching connector (Molex 14-60-0052 (https://www.molex.com/molex/products/part-detail/rb_cbl_wr_trp_conn/0014600052)) on one end, and a high retention connector (Molex housing 51021-0300) (<https://www.molex.com/en-us/products/part-detail/510210300>) and 3 crimp terminals 50079-8001 (<https://www.molex.com/en-us/products/part-detail/500798001>) on the other end. This cable is used to connect the PWM output version of the MA3/MAE3 to the ED3-S (<https://www.usdigital.com/products/accessories/digital-displays/ed3/>), QSB-S (<https://www.usdigital.com/products/accessories/interfaces/usb/qsb/>), or USB4-S (<https://www.usdigital.com/products/accessories/interfaces/usb/usb4/>).





WARNING: This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (<https://oehha.ca.gov/proposition-65>).

Specifications



PIN-OUT

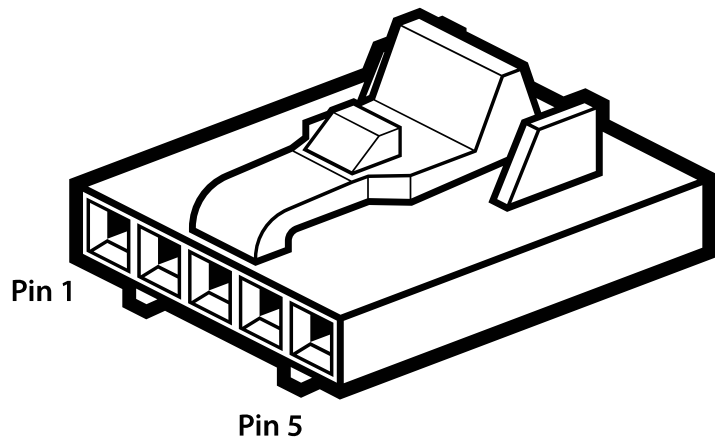

3-PIN SIDE			5-PIN SIDE		
Pin	Description	Color	Pin	Name	Color
1	+5VDC Power	Red	1	Ground	Black
2	PWM Signal	Green	2	-	-
3	Ground	Black	3	PWM Signal	Green
			4	+5VDC Power	Red
			5	-	-

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.

Configuration Options

CA-FC5-SH-MIC3

First Connector

FC5

Cable Type

SH

Second Connector

MIC3

Length

Length

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the CA-FC5-SH-MIC3 product page (<https://www.usdigital.com/products/CA-FC5-SH-MIC3>) for pricing and additional information.

