



CA-MD6-SH-MD6 Product Description


The shielded cable has 26 AWG conductors with a 6-position modular connector on each end. It is for use with US Digital's A2 and A2K encoders, A2T inclinometer, and SEI-USB adapter.



WARNING: This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (<https://oehha.ca.gov/proposition-65>).

Specifications

PIN-OUT

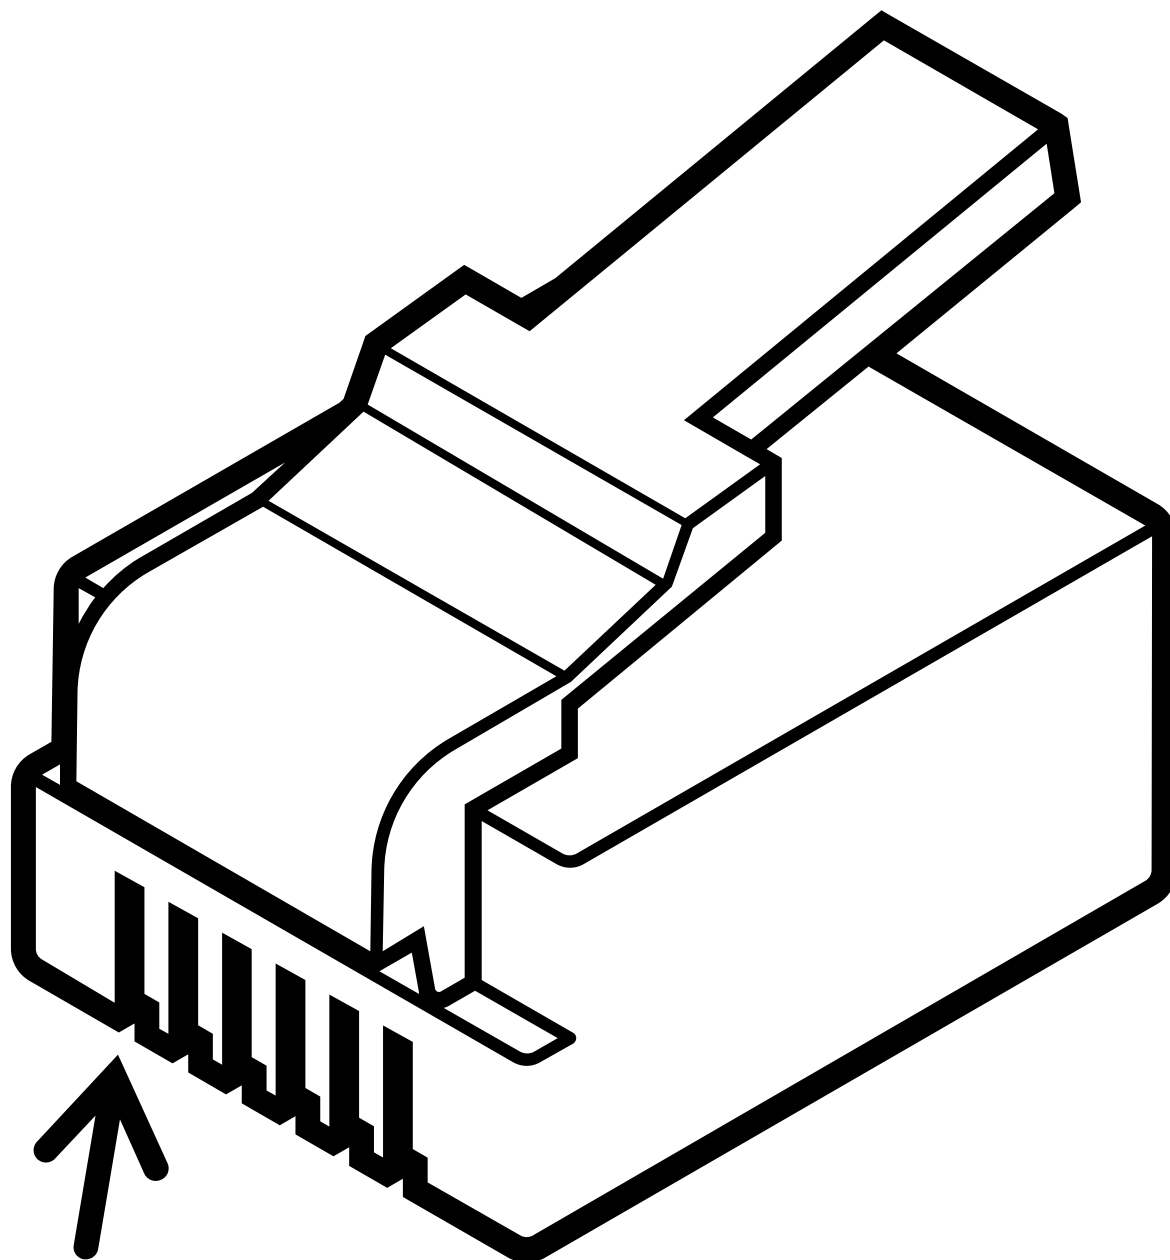

Pin 1



PIN	SEI BUS	COLOR
1	Ground	Brown
2	Busy+ (active high, quiescent low) Analog+	Green
3	Busy- (active low, quiescent high) Analog-	White w/ Green Stripe
4	Power	White w/ Brown Stripe
5	DataL (quiescent high in Mark condition)	Blue
6	DataH (quiescent low in Mark condition)	White w/ Blue Stripe

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.

Configuration Options

CA-MD6-SH-MD6	-	First Connector	-	Cable Type	-	Second Connector	-	Length
		MD6		SH		MD6		Length

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the CA-MD6-SH-MD6 product page (<https://www.usdigital.com/products/CA-MD6-SH-MD6>) for pricing and additional information.